



INTERNATIONAL JOURNAL OF RECENT TECHNOLOGY SCIENCE & MANAGEMENT

“A REVIEW ON DESIGN AND ANALYSIS OF CRANE HOOK”

Sumit Bundela¹, Prof. Ashish Kumar Shrivastava²

¹Research Scholar, Department of Mechanical Engineering, NIIST Bhopal, (M.P.), India

²Assistant Professor, Department of Mechanical Engg., NIIST Bhopal, (M.P.), India

ABSTRACT

Crane hook are highly liable component and are always subjected to failure due to accumulation of large amount of stress which can eventually lead to its failure .In this present work, to study the different design parameter & stress pattern of crane hook in its loaded condition for different cross section, the design and drafting of crane hook. Fatigue failure of a crane hook mainly depends on three major factors i.e. dimension , material , overload .The project is concerned towards increasing the safe load by varying the cross sectional dimensions of the three different sections .The selected sections are rectangular ,triangular, and trapezoidal. A survey of literature for this subject has shown that, various CAD and FEA software used for modelling and analysis of a hook and optimizes the performance of the crane hook based on stress, geometry, and weight.

KEYWORDS: *Crane hook, , Fatigue failure, FEA, Stress, CAD, Weight*

I. INTRODUCTION

The structure strength is the important characteristic to respond the load bearing capability of the elevating equipment. Crane hook is a curved bar used to lift the loads in the cranes. In order to reduce the structure failure in the crane hook, induced stresses are analysed. Fatigue damage is the initiation of crack due to fluctuating loads. It is caused due to stress levels which are insufficient to cause damage in a single application. It is a highly responsible and important component used for industrial applications.

Crane hooks are highly liable components and are always subject to failure due to accumulation of large amount of stresses which can eventually lead to its failure. Crane hooks are the components which are generally used to elevate the heavy loads in industries and constructional sites.

A crane is a machine, equipped with a hoist, wire ropes or chains and sheaves used to lift and move heavy materials. Overhead crane, mobile crane, telescopic crane, gantry crane, jib crane, deck crane, loader crane are some of the commonly used cranes.

Hook is used to grab and lift the loads. It is a hoisting fixture designed to engage a ring or link of a lifting chain or the pin of a shackle or cable socket. Crane hooks with trapezoidal, rectangular, circular or triangular cross sections are commonly used. The hooks must be designed to deliver maximum performance without failure. Hoisting is the process of lifting something or some load or person from lower position to higher position with the help of some device or mechanisms known as hoisting devices or mechanisms. A hoisting device is used for lifting or lowering a load by means of a drum or lift-wheel around

which rope or chain wraps. It may be manually, pneumatically or electrically operated or driven and may use chain, fibre or wire ropes as its medium. [1-5]



Fig.1

Hoisting part of a crane includes:

- Hoist motor
- Gear box
- Drum
- Pulleys
- Wire rope
- Hook

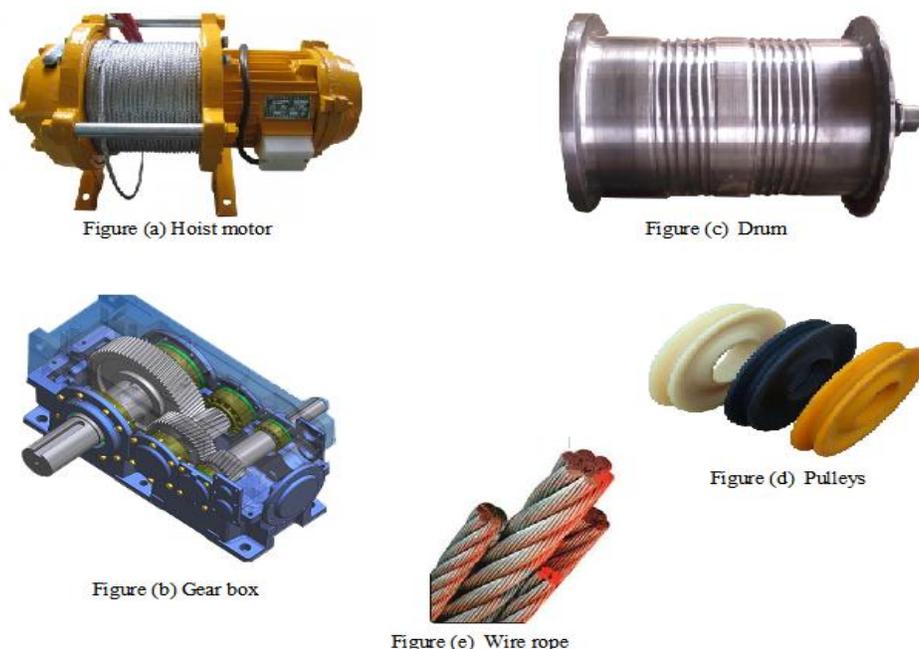


Fig 2

II. FAILURE OF CRANE HOOKS

Strain aging embrittlement due to continuous loading and unloading changes the microstructure [6]. Bending stresses combined with tensile stresses, weakening of hook due to wear, plastic deformation due to overloading, and excessive thermal stresses are some of the other reasons for failure. Hence continuous use of crane hooks may increase the magnitude of these stresses and eventually result in failure of the hook. All the above mentioned failures may be prevented if the stress concentration areas are well predicted and some design modification to reduce the stresses in these areas.

III. LITERATURE REVIEW OF PREVIOUS WORK

In this section, contribution of different researchers is discussed.

Santosh Shaun and Ritesh Dewangan (2012), Travelling cranes of the hand operated type were in use in the 1880's. About this time complicated designs of powered motion were offered by English and American builders, involving a driving shaft along the runway and multiple clutches for transferring the power of the driving shaft to the hoist, trolley or bridge motions. Study of crane hook for trapezoidal cross section finite element analysis santosh Shaun , in this paper CAE is used to shorten the development FEM concept is used in the locking system of the crane hook stress factor is distributed uniformly[1]

M. Shaban et. al (2013), studied the stress pattern of crane hook in its loaded condition, a solid model of crane hook is prepared with the help of ABAQUS software. Real time pattern of stress concentration in 3D model of crane hook is obtained. The stress distribution pattern is verified for its correctness on an acrylic model of crane hook using shadow optical method (Caustic method) set up. [2]

E. Narvydas et. al (2012), investigated circumferential stress concentration factors with shallow notches of the lifting hooks of trapezoidal cross-section employing finite element analysis (FEA). The stress concentration factors were widely used in strength and durability evaluation of structures and machine elements. The FEA results were used and fitted with selected

generic equation. This yields formulas for the fast engineering evaluation of stress concentration factors without the usage of finite element models. The design rules of the lifting hooks require using ductile materials to avoid brittle failure; in this respect they investigated the strain based criteria for failure, accounting the stress triaxiality.[3]

Ram Krishna Rathore et. al (2012), this paper involves A general approach for the multiple response cases optimization start with using the regression models to calculate the correlations between response functions and control factors. Then, a system for collecting various response functions together into a one quantity, such as an objective function, is engaged and at last, an optimization technique is used to calculate the best combinations for the control functions..[4]

SpasojeTrifkovic' et. al (2011), this paper analyzes the stress state in the hook using approximate and exact methods. They calculated stresses in various parts of the hook material firstly by assuming hook as a straight beam and then assuming it as a curved beam. Analytical methods were used with the help of computers, using FEM.[5]

Bhupender Singh et al (2011), Work presented involves the solid modeling and finite element analysis of crane boom has been done using PRO/E WILDFIRE 2.0 and ALTAIR HYPER MESH with OPTISTRUCT 8.0 SOLVER Software to get the variation of stress and displacement in the various parts of the crane boom and possible actions are taken to avoid the high stress level and displacement. By using Finite Element Analysis the following objectives have been achieved.

Y. Torres et. al (2010), initially studied the probable causes which led to a failure of the crane hook in service. The study of accident includes: details of the standards governing the manufacturing and use of lifting hooks, experimental analysis, mechanical behaviour of steel of reported hook and simulation of the thermal history of the hook. It was concluded that the accident was caused by the strain-aging embrittlement of the used steel. The brittle fracture was originated from a crack in the material, generated during the welding performed on the lifting hook.[7]

Takuma Nishimura et. al (2010), studied the damage estimation of crane-hooks. They estimated the load conditions which were assumed to be crucial to the crane-hook damages. FEM model of the crane-hook referring to one of its actual designs was constructed. A database was prepared based on the FEM model; it was constructed as a collection of a number of various possible load conditions and the corresponding deformation values, obtained as the results of the FEM analysis. The database was used to identify the load conditions that were fatal to those damaged crane-hooks. Some of the feature points were selected on the crane-hook design; the deformation of a damaged crane-hook can be then obtained based on the feature points detected by means of the image processing. The critical load condition of the damaged crane-hook was calculated by comparing the obtained actual deformation and the simulated deformation values in the database. On the basis of these calculated load conditions, the critical load condition for the crane-hook was estimated as a statistical distribution based on the Bayesian approach. [8]

C. Oktay AZELOGLU et. al (2009), this paper presents the different methods of stress calculation for lifting hooks based on different assumptions. They applied curved beam theory, Finite Element Method and photo elasticity experiments to obtain the stress field on the hook. As a result, different methods used to obtain the stress field on the hook are compared. Some recommendations were suggested for lifting hook calculations on the field applications.[9]

Bernard Ross et. al (2007), this paper describes the comprehensive engineering analysis of the crane accident, undertaken to disprove the Mitsubishi theories of failure as confirmed by jury verdict. Among the topics discussed were: wind tunnel testing, structural analyses of the boom, metallurgy of failed parts from a critical king-pin assembly, and soils engineering work related to ground loads and displacements during the lift. Crucial role of the SAE J1093, 2% design side load criterion and Lampton's justification for an 85% crawler crane stability criterion were presented.[10]

IV. ANALYTICAL METHOD FOR STRESS CALCULATION

Curved beam flexure formula is used when the curvature of the member is pronounced as in case of hook for different cross sections mathematical analysis of stress

$$\sigma = \frac{F}{A} + \frac{M \times y}{I}$$

Where, M =maximum bending moment.

Y =Distance between centroidal axis to neutral axis.

I =Moment of inertia for different cross sections.

Table: 1 Values of Radius of neutral surface for various cross sections

S.NO	GEOMETRY	VALUES
1.	RECTANGLE	$R = h / \ln(r_2/r_1)$
2.	CIRCLE	$R = 1/2 (\bar{r} + \{ \bar{r}^2 \}^{1/2} - \{ c^2 \}^{1/2})$
3.	TRIANGLE	$R = h^2/2 / \{ r_2 \ln(r_2/r_1) - h \}$
4.	TRAPEZOID	$R = h^2/2 \times (b_1 + b_2) / (b_1 r_1 - b_2 r_2) \ln(r_2/r_1) - h (b_1 - b_2)$

V. CONCLUSION

Static analysis is helpful for understanding and improving the operating performance of the crane hook. Static analysis has very important significance for the life of the specific parts. Specific process will be no longer introduced. This concept of Static analysis is followed by number of researches for their application and Finite Element Method (FEM) is one of the most effective and powerful method for the stress analysis of the crane hook. This review provides the background of crane hooks to carried out further research work in same era.

REFERENCES

1. Santosh Shaun, Ritesh Dewangan, Manas Patnaik, Narendra Yadav; “ Study of Crane Hook Having Trapezoidal Section by Finite Element Method & Design of Experiments” International Journal of Modern Engineering Research Vol.2 Issue pp-2779-2781 ISSN: 2249-66454 July-Aug 2012.
2. M. Shaban, M. I. Mohamed, A. E. Abuelezz and T. Khalifa, “Determination of Stress Distribution in Crane Hook by Caustic”, International Journal of Innovative Research in Science, Engineering and Technology, Vol. 2, Issue 5, May 2013.

3. E. Narvydas, N. Puodžiūnienė, “Circumferential stress concentration factors at the asymmetric shallow notches of the lifting hooks of trapezoidal cross-section”, ISSN 1392 - 1207. MECHANIKA. 2012 Volume 18(2): 152-157.
4. Ram Krishna Rathore, Amit Sarda and Rituraj Chandrakar; “An Approach to optimize ANN Meta model with Multi Objective Genetic Algorithm for multi-disciplinary shape optimization”, International Journal of Soft Computing and Engineering (IJSCE), ISSN: 2231- 2307, Volume-2, Issue-1, March 2012.
5. SpasojeTrifković, NebojšaRadić et. al, “Stress analysis of crane hook using FEM”, INFOTEH-JAHORINA Vol. 10, Ref. C-2, p. 244- 248, March 2011.
6. Bhupender Singh, Bhaskar Nagar, B.S. Kadam and Anuj kumar, “Modeling and Finite Element Analysis of Crane Boom”, International Journal of Advanced Engineering Research and Studies, Vol. I/ Issue I/October-December, 2011/ 51-52
7. Y. Torres , J.M. Gallardo , J. Domínguez , F.J. Jiménez E, “Brittle fracture of a crane hook”, Engineering Failure Analysis 17 (2010) 38–47
8. Takuma Nishimura, Takao Muromaki et. al, “Damage Factor Estimation of Crane Hook (A Database Approach with Image, Knowledge and Simulation)”, 4th International Workshop on Reliable Engineering Computing (REC 2010).
9. C. Oktay AZELOĞLU, Onur ALPAY, Investigation Stress of A Lifting Hook with Different Methods, “Verification of The Stress Distribution with Photo elasticity Experiments”, Electronic Journal of Machine Technologies, Vol: 6, No: 4, 2009 (71-79).
10. Brnard Ross, Brian McDonald, S.E. Vijay Saraf, “Big blue goes down. The Miller Park crane accident”, Engineering Failure Analysis 14 (2007) 942–961
11. ASME Standard B30.9, “Slings Safety Standard for Ca- bleways, Cranes, Derricks, Hoists, Hooks, Jacks and Slings,” 2006.
12. ASME Standard B30.10, “Hooks Safety Standard for always, Cranes, Derricks, Hoists, Hooks, Jacks and Slings,” 2009.
13. R. S. Khurmi, “Strength of materials” 23rd Edition Chapter 33 (2009).