



IJRTSM

INTERNATIONAL JOURNAL OF RECENT TECHNOLOGY SCIENCE & MANAGEMENT

“DESIGN & STATIC ANALYSIS OF MANUAL PALLET TRUCK USING FEM METHOD BY ANSYS SOFTWARE ”

Shadab Khan ¹, Rahul Mishra ²

¹P.G. Scholar, Dept. of Mechanical Engineering, IES, Bhopal, MP, India

²Assistant Professor, Dept. of Mechanical Engineering, IES, Bhopal, MP, India

ABSTRACT

In this thesis, study has been carried out on the manufacturing process and functional activities of manual operated pallet truck and came across with the various problems and handling in the current system. After thorough studies, careful static analysis and reviews of the various manufacturing systems and technologies. Manual Pallet Truck are robust in construction and are smooth in operations. Manual Pallet Truck are able to work efficiently for pallets on high rack, smooth control of precise lifting and lowering. By this project man power effort and time can reduce. We design and analyze of carriage fork. Our aim is design and develops a model of Manual Pallet Truck .This system has a significant importance in the equipment and material handling. 2 D and 3D modeling has done by CATIAV5R20 software and simulation has done by ANSYS.17.0 software.

Keyword: Manual Pallet Truck , manufacturing, pallet, lifting, static analysis, ANSYS

I. INTRODUCTION

Material handling (MH) involves “short-distance movement that usually takes place within the confines of a building such as a plant or a warehouse and between a building and a transportation agency.”¹ It can be used to create “time and place utility” through the handling, storage, and control of material, as distinct from manufacturing (i.e., fabrication and assembly operations), which creates “form utility” by changing the shape, form, and makeup of material. It is often said that MH only adds to the cost of a product, it does not add to the value of a product. Although MH does not provide a product with form utility, the time and place utility provided by MH can add real value to a product, i.e., the value of a product can increase after MH has taken place; for example:

The value (to the customer) added by the overnight delivery of a package (e.g., Federal Express) is greater than or equal to the additional cost of the service as compared to regular mail service—otherwise regular mail would have been used.



Fig 1.1

The value added by having parts stored next to a bottleneck machine is the savings associated with the increase in machine utilization minus the cost of storing the parts at the machine. Electric Pallet Stacker is a thin, highly-versatile lift that compliments nearly any primarily indoor application. Balanced similar to a traditional forklift and without base legs, the Counter-Balanced Electric Stacker can fit into tight spaces. Extremely durable and budget friendly, the Toyota Counter-Balanced Stacker can help increase both your uptime and your bottom line.

II. STACKER SPECIFICATIONS

Capacity	Kg	1000
Max fork height	mm	90
Min fork height	mm	35
Lifting height	mm	55
Weight of unit	Kg	25

III. PROPERTIES OF MATERIALS USED FOR MANUAL PALLET TRUCK

Table 3.1 Structure Steel Mechanical properties

Material Field Variable	Value	Units
Density	7750	Kg/m ³
Young's modulus	1.93E+05	Mpa
Poisson Ratio	0.31	
Shear modulus	76664	Mpa
Bulk Modulus	1.6937E+05	Mpa
Tensile Yield Strength	207	Mpa
Compressive Yield Strength	207	Mpa
Tensile Ultimate Strength	586	Mpa

Table 3.2 Aluminium Alloy Mechanical properties

Material Field Variable	Value	Units
Density	2770	Kg/m ³
Young's modulus	7.1E+10	Mpa
Poisson Ratio	0.33	
Shear modulus	2.6692E+04	MPa
Bulk Modulus	6.9608E+04	MPa
Tensile Yield Strength	280	Mpa
Compressive Yield Strength	280	Mpa
Tensile Ultimate Strength	310	Mpa

Table 3.3 Carbon Fiber Mechanical properties

Material Field Variable	Value	Units
Density	1490	Kg/m ³
Young's modulus X Direction	125000	Mpa
Young's modulus Y Direction	8600	Mpa
Young's modulus Z Direction	8600	Mpa
Poisson Ratio XY	0.27	
Poisson Ratio YZ	0.4	
Poisson Ratio ZX	0.27	Mpa
Shear modulus XY	4700	Mpa
Shear modulus YZ	3100	Mpa
Shear modulus XZ	4700	Mpa

IV. MODELING & SIMULATIONS

The full form of CATIA is Computer Aided Three-dimensional Interactive. CATIA V5 is a powerful software package yet has a relatively short learning curve. One of the reasons for the short learning curve is that it is fully Windows compatible and the processes are consistent across the workbenches, toolbars and tools.

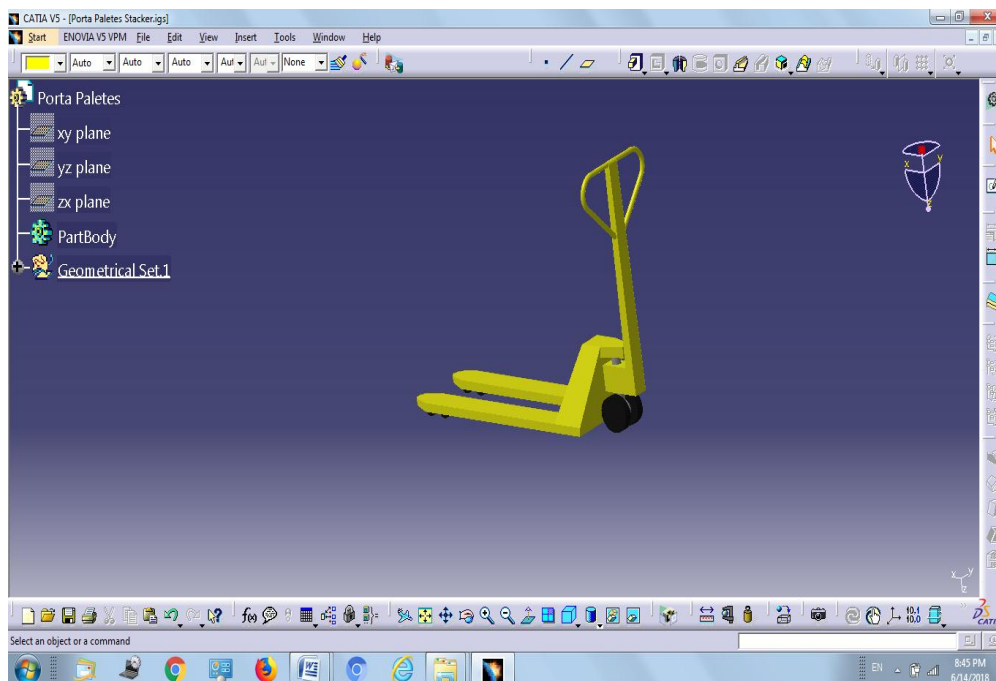


Fig.4.1 CATIA Model of stacker

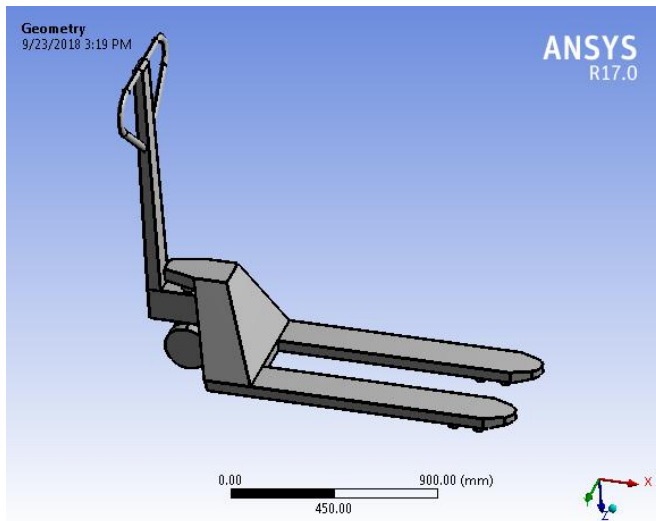


Fig.4.2 Import Geometry in ANSYS

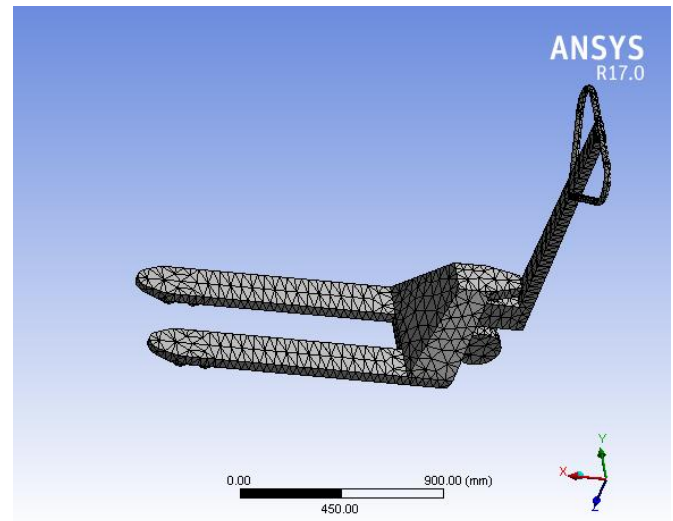


Fig.4.3 Geometry Meshing

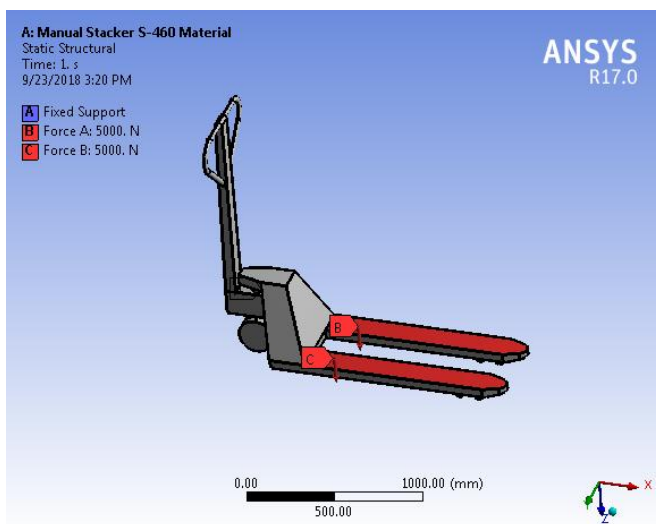


Fig.4.4 Boundary conditions (Structural Steel)

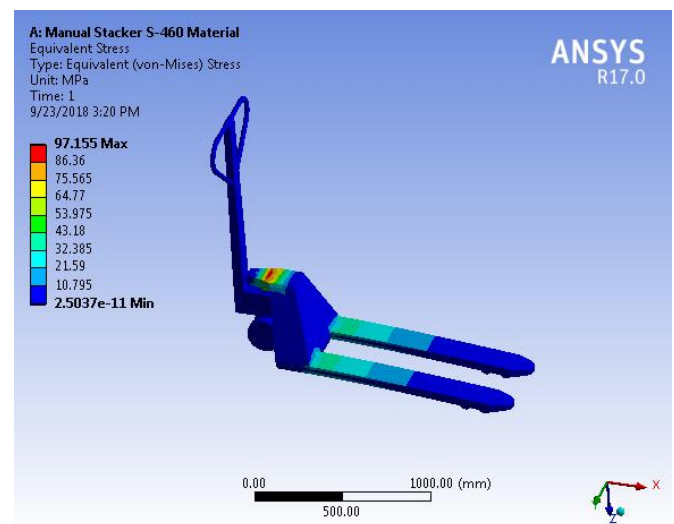


Fig.4.5 Equivalent Stress (Structural Steel)

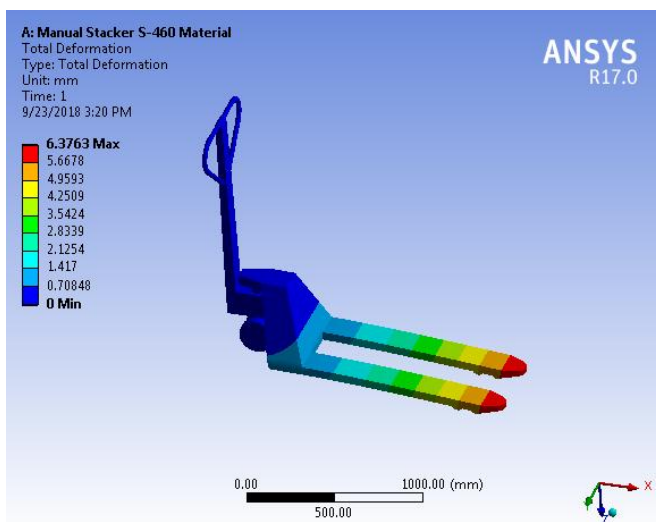


Fig.4.6 Total Deformation (Structural Steel)

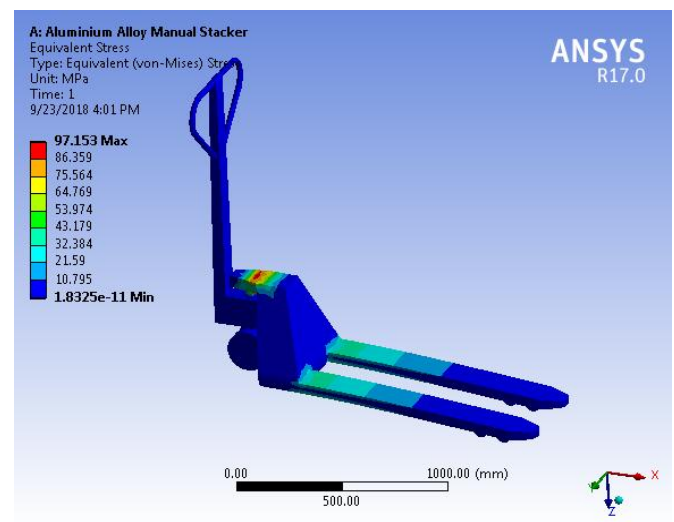


Fig.4.7 Equivalent Stress (Aluminium Alloy)

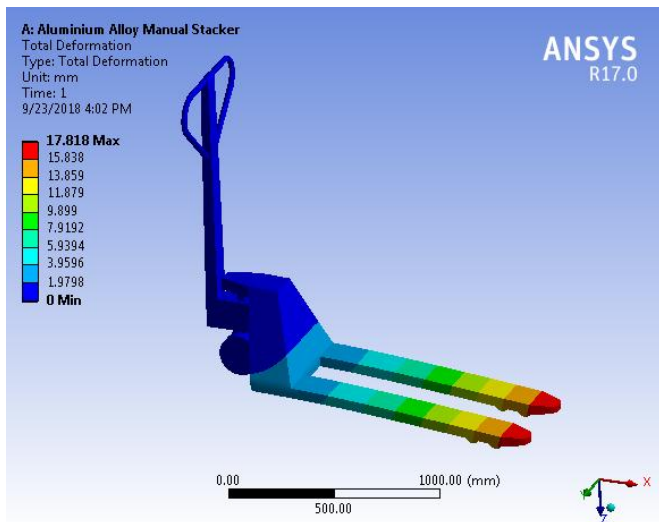


Fig.4.8 Deformations (Aluminium Alloy)

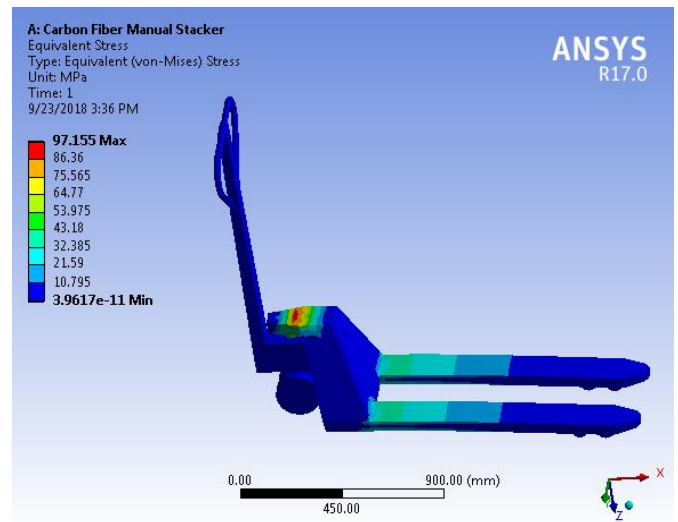


Fig.4.9 Carbon Fiber Equivalent Stress

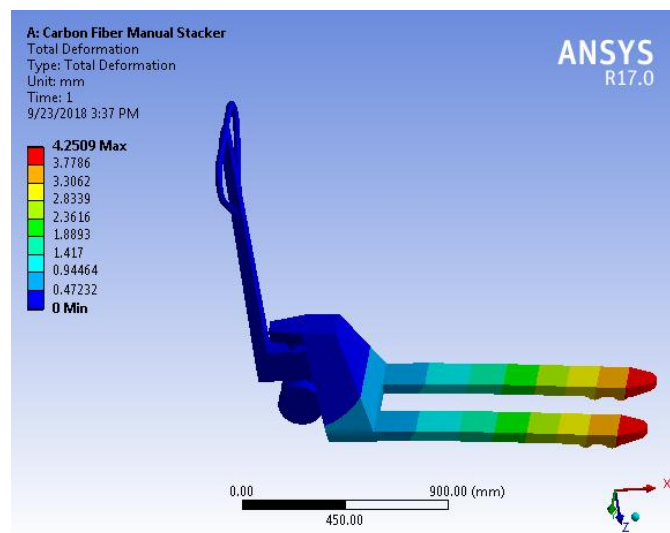


Fig.4.10 Carbon Fiber Deformation

V. RESULTS & DISCUSSIONS

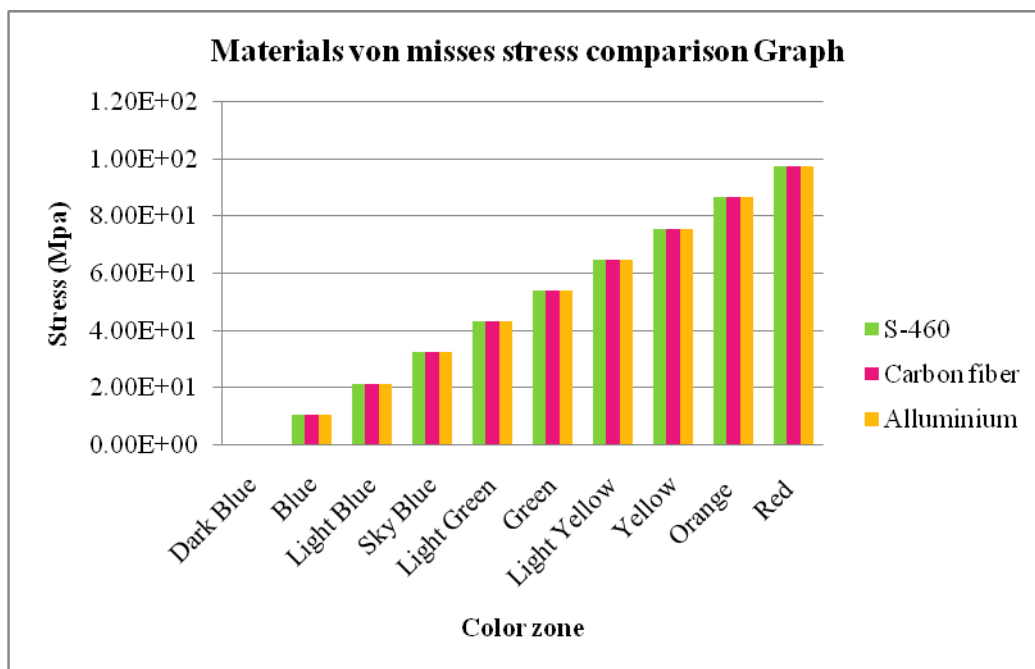


Fig.5.1 Stress comparison with different materials

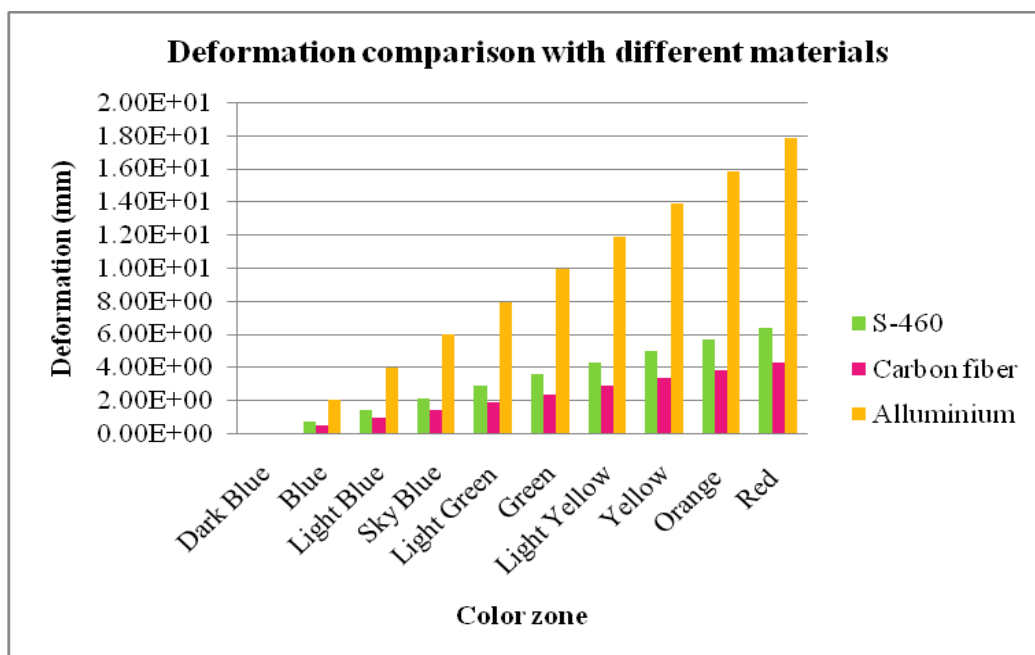


Fig.5.2 Deformations comparison with different materials

Manual Pallet Truck are robust in construction and are smooth in operations. Manual Pallet Truck are able to work efficiently. Smooth control of precise lifting and lowering. By this project man power effort can be reduce and time of work can reduce. And we designed and analyzed of carriage fork with different load. This system has a significant importance on the equipment and material handling system considering the aspects of noise and vibration.

The objective of this work is to present an improved methodology, based on numerical and experimental analysis; to evaluate the life of the manual pallet truck system. It can be improving the industrial work. and also improve the material handling equipment system. In the last several years' material handling has become a new, complex, and rapidly evolving science. For moving material in and out of warehouse many types of equipment and system are in use, depending on the type of products and volume to be handled. The equipment issued, in loading and unloading operations, for movement of goods over short distances. The handling of material in warehouse is restricted to unitized forms, which require smaller size equipment. However, for bulk handling of material at logistics nodes such as fully automatic stacker can be used for the appropriate need of improved industry.

In this work we find value of vonmises stresses S-460, Aluminium Alloy, and Carbon fiber are respectively **97.155 MPa**, **97.153 MPa** and **97.155 MPa** And total deformation for these materials likes S-460, Aluminium Alloy, and Carbon fiber are respectively **6.3763 mm**, **17.818 mm**, and **4.2509 mm**.

Here we can see that we have used four different materials in all materials we will be selected composite material to other than because it is light weight and heavy duty its deformation and stresses range are considerable under 1000 kg loading condition.

VI. CONCLUSION

In this projects we can see that we have used four different materials in all materials we will be selected composite material to other than because it is light weight and heavy duty its deformation and stresses range are considerable under 1000 kg loading condition and its very light weight compare to other than materials here we have optimize the unit weight of Pallet Truck 30% and its simple in construction ,convenient lifting operating system and special design is available according to customers' requirements.

VII. FUTURE SCOPE

For further research work can be extended by using different materials and in future we can do work on stacker machine with composite materials and optimize weight, cost parameter.

REFERENCES

- 1 K.VamsiKrishna,S. Porchilamban, Development and Structural Analysis of Masthead for a Twin Boom Stacker, International Journal of Engineering Development and Research, 2014, Volume 2, Issue 1
- 2 Sivasubramanian A., Jagadish M., Sivaram C.,Design and Modification of Semi-Automatic Stacker, Indian Journal of Applied Research,Volume : 4, Issue : 4, ISSN - 2249-555X, 2014.
- 3 Teus van Vianen,JaapOttjes, GabriëlLodewijks, Simulation-based rescheduling of the stacker-reclaimer operation, Journal of Computational Science, 2014
- 4 Sen Chun Miao, Yong JiSun, Ting Ting Wang, The Transient Dynamic Analysis of multi-stage Fork of Stacker, Journal of applied science and engineering innovation, Vol.1, No.1 2014
- 5 Niraj Kumar Sahu, Ram PrakashBhatele, Stacker/Reclaimer Long Travel Drive Operation with Vfd- A Performance Study, International Journal of Science, Engineering and Technology Research (IJSETR), Volume 3, Issue 3, March2014

[http:// www.ijrtsm.com](http://www.ijrtsm.com)© *International Journal of Recent Technology Science & Management*

- 6 M. H. Tian, S. C. Hu, "Optimization of the Hinge Point Position of Luffing Mechanism in Reach Stacker for Container", Advanced Materials Research, Vol. 694-697, pp. 142-147, May. 2013
- 7 Yanjun Xiao, Diming Guo, Xinyu Liang and Yuming Guan, The Finite Element Analysis of Trolley Frame of Stacker-Reclaimer Running Mechanism Based on ANSYS, Research Journal of Applied Sciences, Engineering and Technology, 2013, 6(16): 3015-3017
- 8 Oscar fenn Daniel, A. Hussainlal, Stress Analysis in Pulley of Stacker-Reclaimer by Using Fem Vs Analytical, IOSR Journal of Mechanical and Civil Engineering, Page 52-59,ISSN: 2278-1684.
- 9 Sarabjeet Singh, Yash Parikh, Finite Element Analysis of Stacker Mechanism used in Bearing Manufacturing, International Journal of Innovative Research in Advanced Engineering, Issue 2, Volume 2, 2015.
- 10 Syed Sajid Ahmad Syed Nisar , Prof. K. I. Ahmad Prof. M. Sohail Pervez "Design and Optimization of Industrial Pallets for Handling Engine Blocks of Mahindra Scorpio" IJIRST –International Journal for Innovative Research in Science & Technology| Volume 3 | Issue 01 | June 2016.
- 11 Blackstone CEJ (1998) The development of overhead crane robotics for automated handling and storage. In: Proceedings of the Institute of Mechanical Engineers, International Conference on Advance Handling Systems, London, 24–25 May
- 12 Bush RJ, Bejune JJ, Hansen BG, Araman PA (2002) Trends in the use of materials for pallets and other factors affecting the demand for hardwood products. In: Proceedings of the 30th Hardwood Symposium, Fall Creek Falls, Tennessee, May 30–June 1, pp 76–81
- 13 Loscam Limited (2003) Standard pallet. www.loscam.com/standard_pallet.htm, Box Hill, Victoria, Australia, cited November 2003
- 14 McCurdy DR, Phelps JE (1995) Characteristics of pallet use in the US. Department of Forestry, Southern Illinois University, Carbondale, Illinois
- 15 National Wooden Pallet and Container Association (1997) Pallet users view plastic as the wave of the future. Pallet Talk Newsletter 97(7):14–15
- 16 White MS (1996) Comparative performance of timber, structural panel deck, plastic and corrugated paperboard pallet. Pallet and Container Research Laboratory, Virginia Polytechnic Institute and State University, Blacksburg, Virginia
- 17 Granta Design Limited (2001) CES Selector 4.0. Material Properties Data Software, Cambridge, UK
- 18 Higham R (1971) A handbook of paperboard and board. Business Books Ltd, London
- 19 Patricio MA, Maravall D. A novel generalization of the gray-scale histogram and its application to the automated visual measurement and inspection of wooden pallets. J Image Vision Comput 2007; 25:805–16.
- 20 Kabir MF, Schmoldt DL, Araman PA, Schafer ME, Lee SM. Classifying defects in pallet stringers by ultrasonic scanning. J Wood Fiber Sci 2003;35:341–50.
- 21 Kabir MF, Schmoldt DL, Schafer ME. Time domain ultrasonic signal characterization for defects in thin unsurfaced hardwood lumber. J Wood Fiber Sci 2003; 34:165–82.