



## IJRTSM

### INTERNATIONAL JOURNAL OF RECENT TECHNOLOGY SCIENCE & MANAGEMENT

#### “THERMAL ANALYSIS ON COOLING PLATE FOR BATTERY MODULE OF AN ELECTRIC VEHICLE”

Saurabh Kumar <sup>1</sup>, Rajneesh Gadam <sup>2</sup>

<sup>1</sup> M.Tech. Scholar, Department of Mechanical Engineering, Bhabha University Bhopal MP

<sup>2</sup> Assistant Professor, Department of Mechanical Engineering, Bhabha University Bhopal MP

#### ABSTRACT

*To address a progression of warm out of control issues brought about by temperature and the expense issue brought about by the unreasonable volume of the battery warm administration framework (BTMS), this paper presents an original air cooling BTMS which decreases the temperature and volume. In this review, we introduce the spoilers in the battery hole dispersing, which can actually further develop the hotness scattering execution of the battery. Right off the bat, this paper examines the impact of the shape, number and length of the spoilers on the most extreme temperature (MaxT) and temperature consistency of the battery module. The main objective of battery pack heat management is to reduce uneven temperature distribution, i.e. the homogeneity of the temperature within the battery pack in a range between 3°C to 4°C, in ambient conditions that range from -35°C to 50°C.*

**Key Words:** BTMS, battery, framework, temperature

#### I. INTRODUCTION

Electric vehicles (EVs) are favored Lithium-particle batteries for energy capacity on its specialized elements. The greater expense, low release rate, long life cycle, and restricted energy thickness of the presently accessible li-particle battery brings about low effectiveness to defeat these issues at their fullest limit [1]. The exhibition of EVs is profoundly dependent on the battery limit and its center temperature assumes a significant part in battery execution. Wan et al [2] concentrated on warm execution of a smaller than expected circle heat pipe utilizing water-copper nanofluid. Mochizuki et al (2014) concentrated on Heat pipe-based detached crisis center cooling framework for safe closure of an atomic power reactor. Zhao et al [3] audited the warm exhibition further developing techniques for lithium-particle battery anode adjustment and warm administration framework. The battery temperature strongly affects charging and releasing pace of the battery. This makes the warm administration of an EV battery pack critical, plan of energy-thick packs need to utilize hearty cooling frameworks, regularly utilizing fluid cooling circles with many channels. The intricacy of these frameworks adds to the expense - somewhere near 10-20% of the general expense of the battery pack. Li-particle batteries are especially defenseless to warm flee occasions for one or two reasons, including their high energy content and their inclination to self-heat once the electrolyte arrives at a specific temperature (from 70° to 130° C). Li-Ion cells are normally exposed to crumbling with time because of their working circumstances and condition of charge. Temperature significantly affects the productivity of essentially all batteries [4]. Because of notoriety of fast charging and execution driving, the hotness misfortunes in the cell increments because of high current in the cells [4]. There are two principle wellsprings of hotness age in a battery cell: electrochemical activity and joule warming because of the movement of electrons inside a battery cells. The temperature scope of 25 °C to 40 °C gives the ideal working circumstances to Li-particle batteries and in the event

that the temperature is raised over 50 °C it becomes destructive for the life expectancy of the batteries;. Indeed, even a solitary cell's youthful weakening can decrease the exhibition and productivity of the entire battery pack extensively. The primary point of the BTMS is to direct the temperature of the cells of the battery and along these lines increment the life expectancy of the battery. There are two primary kinds of BTMS: dynamic frameworks and aloof frameworks. The dynamic framework principally relies upon constrained dissemination of a particular coolant like water or air.

### Direct Refrigerant cooling

Like dynamic fluid frameworks, an immediate refrigerant framework (DRS) comprises of an Air Conditioning circle, yet Direct Refrigerant System utilizes refrigerant straightforwardly as hotness move liquid flowing all through the battery pack.

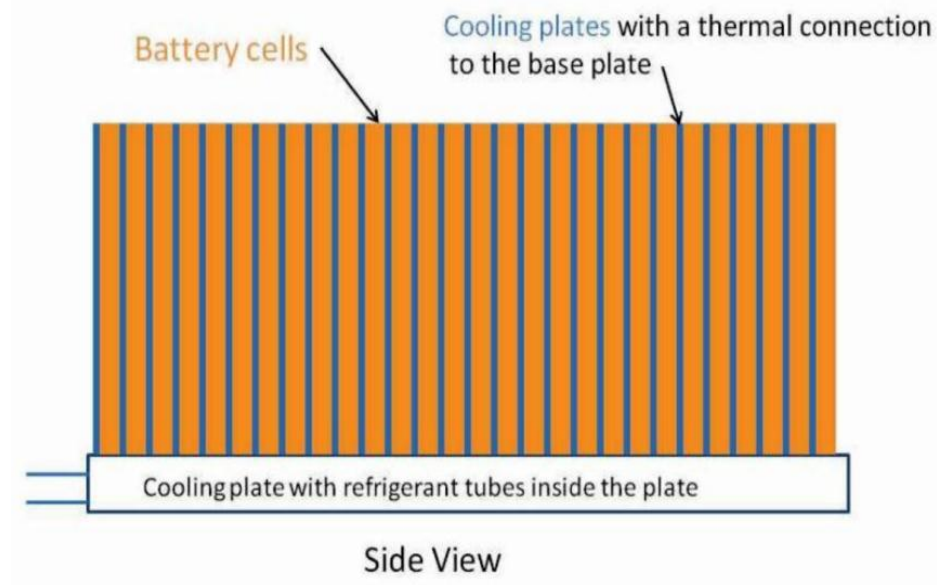


Fig.1.1 Direct Refrigerant Liquid cooling

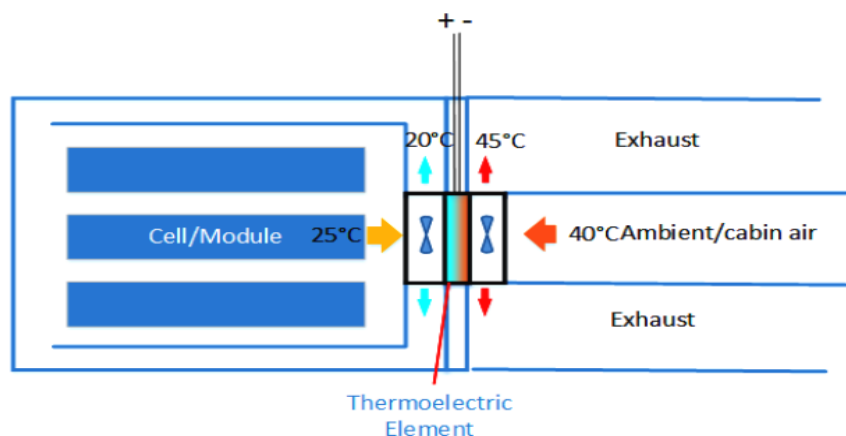


Fig 1.2 Thermoelectric cooling / heating system

## II. RESEARCH METHODOLOGY

With everything taken into account, there are two central fragments that were performed at this moment. The essential fragment is to develop a 3-layered model of the grip circle, followed by performing restricted part examination using business limited part (FE) programming to consider the warm furthest reaches of the business grasp plate as showed up in figure under

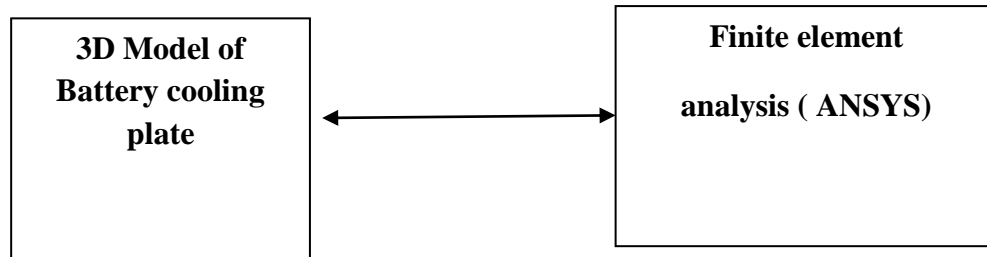


Fig. 2.1: Main Battery cooling plate limited component examination venture

### FINITE ELEMENT ANALYSIS

The restricted part technique is mathematical examination framework for finding unpleasant solutions for a wide combination of planning issues. Because of its various assortment and flexibility as an examination gadget, it is tolerating a great deal of thought in essentially every industry. In progressively planning conditions today, observe that it is essential to gain unpleasant solutions for issue rather than exact shut find course of action. It is incomprehensible to hope to find insightful mathematical solutions for some, building issues. An intelligent courses of action is a mathematical explanation that gives the assessments of the best dark sum at any region in the body, as result it is real for ceaseless number of region in the body. For issues including complex material properties and cutoff conditions, the planner resorts to mathematical procedures that give induced, yet commendable courses of action. The restricted part procedure has turned into an indispensable resource for the mathematical courses of action of a wide extent of building issues. It has been developed meanwhile with the extending use of the fast electronic automated PCs and with the creating complement on mathematical procedures for planning examination. This methodology started as a hypothesis of the helper plan to specific issues of adaptable continuum issue, started with respect to different circumstances. All the above frameworks have been coordinated with usage of a predefined conditions and prerequisites that helps with obtain the suitable and trustworthy result.

### Methodology

Stage 1: Aggregation data and information connected with cooling balances of IC motors.

Stage 2: an absolutely parametric model of the motor square with balance is made in ANSYS programming system bundle.

Stage 3: Model got in Step an attempt of is examined utilizing ANSYS 19. (Workbench), to get the hotness or hotness rate, warm inclination and nodal temperatures.


Stage 4: Manual computations are finished.

Stage 5: Finally, we will generally will more often than not check the outcomes acquired from ANSYS and manual calculations for totally unique material, shapes and thickness.

### III. MATERIAL PROPERTIES

*Table 3.1: The properties and value used in the analysis*


Size of battery cell	$11 \times 248 \times 260 \text{ mm}^3$
Size of aluminum cooling plate	$t \times 248 \times 260 \text{ mm}^3$
The type of Al plate	Al-1100
The temperature of coolant	$25^\circ\text{C}$
Heat capacity of battery cell	$880 \text{ J/kg} \cdot \text{K}$
Heat conductivity of battery cell	$4 \text{ W/m} \cdot \text{K}$
Heat transfer coefficient (b/w Al plate battery)	$1000 \text{ W/m}^2 \cdot ^\circ\text{C}$
Thermal dissipation of the battery	12 W (Average value)

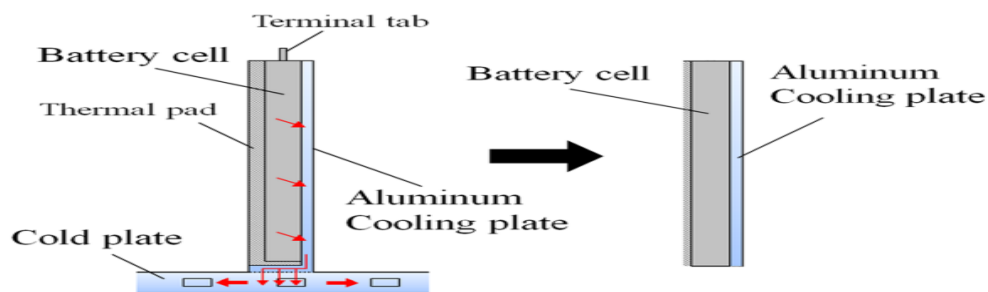

*Fig. 3.1 Simplification of 2D battery model*

### IV. MODELING & SIMULATION

#### 4.1 Modeling of cooling plate

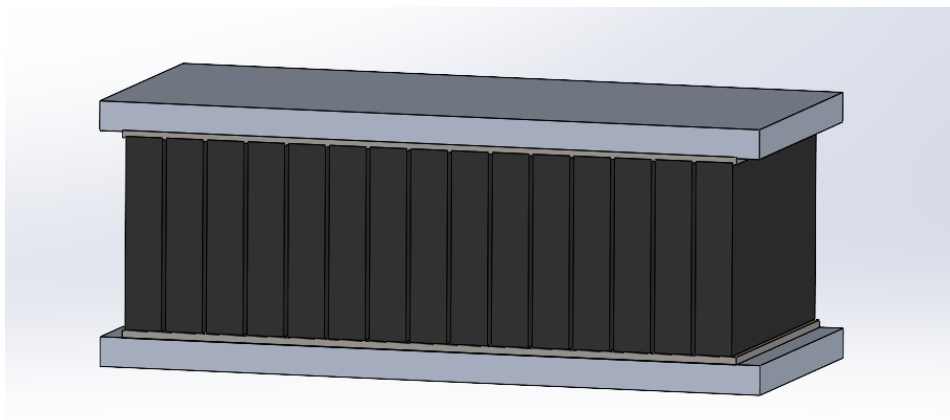

**Fig.4.1 3D model of cooling plate with 15 Lead battery set box**

#### 4.2 AL Oxide

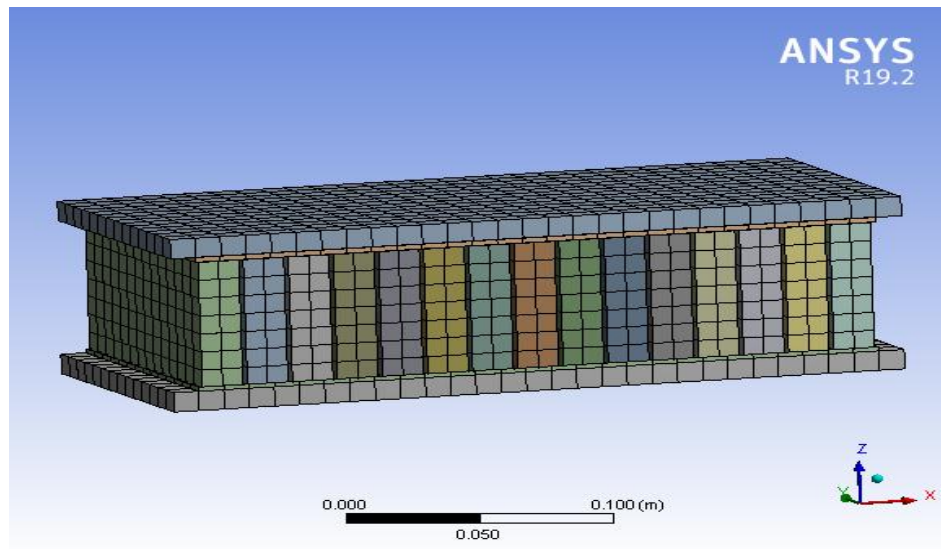


Fig. 4.2 AL 92 Alloy material cooling plate meshing

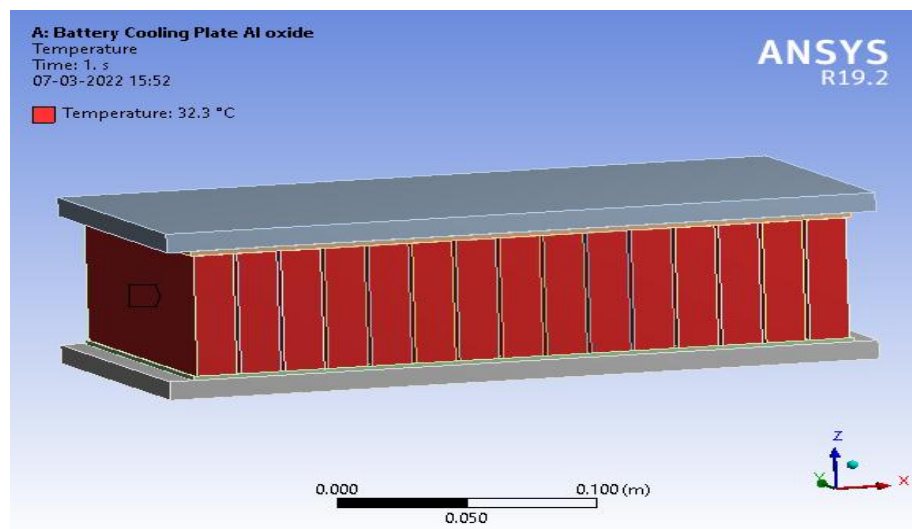


Fig 4.3 AL 92 Alloy material cooling plate thermal boundary condition applied at battery 32.3 °C

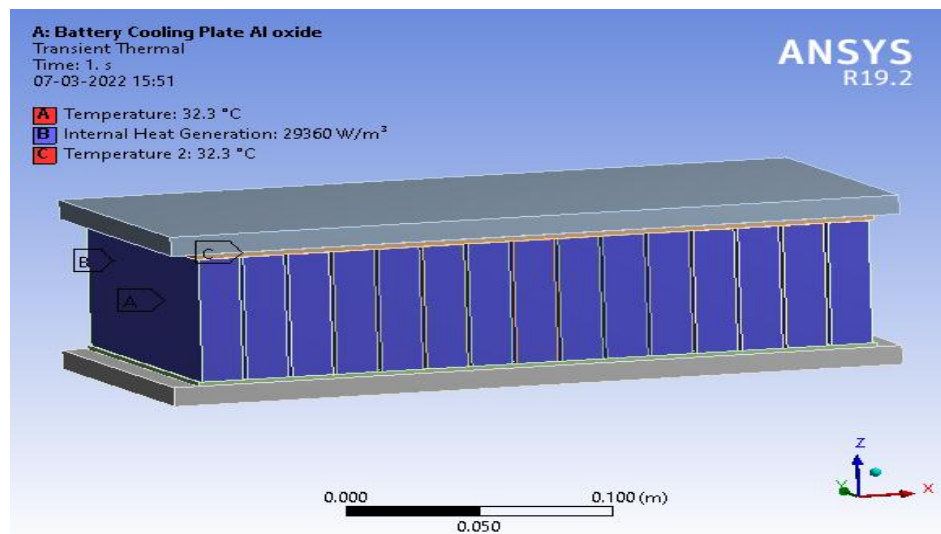


Fig.4.4 AL 92 Alloy material cooling plate thermal boundary condition applied

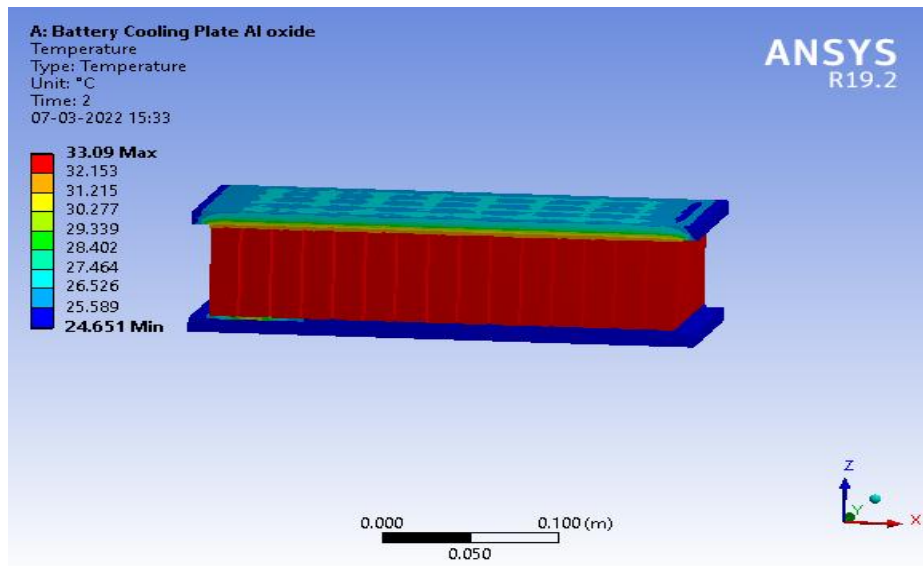


Fig.4.5 AL Oxide Alloy material cooling plate temperature results

#### 4.2 AL 92 material

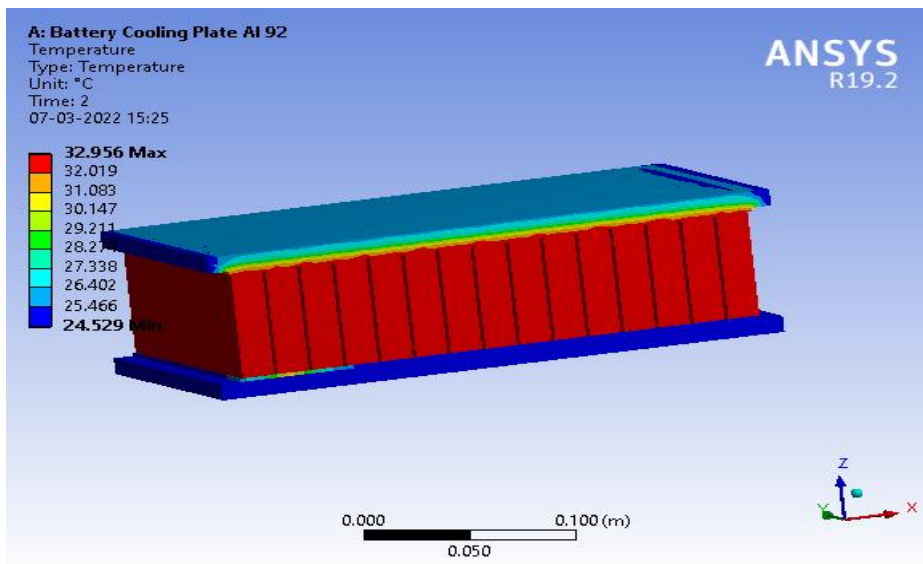


Fig 4.6 AL 92 Alloy material cooling plate temperature results

#### 4.3 AL 96 Alloy material

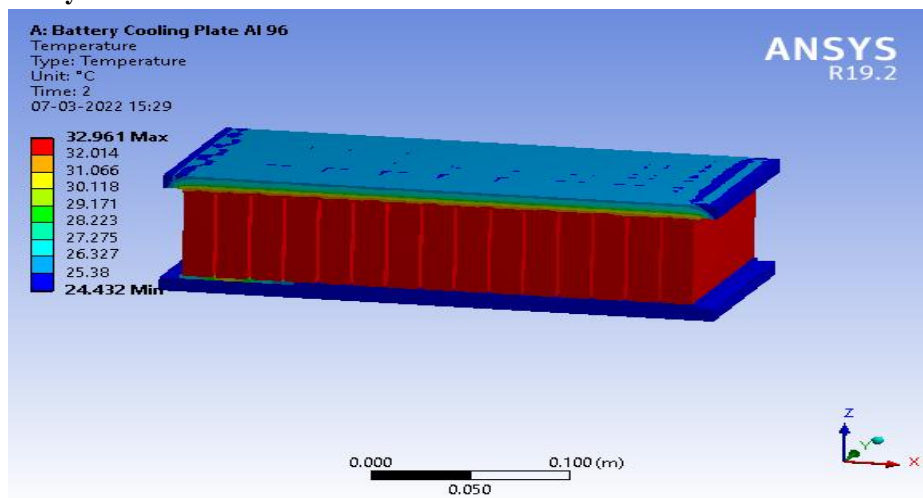


Fig.4.7 AL 96 Alloy material cooling plate temperature results



#### 4.4 Al 1100 Alloy

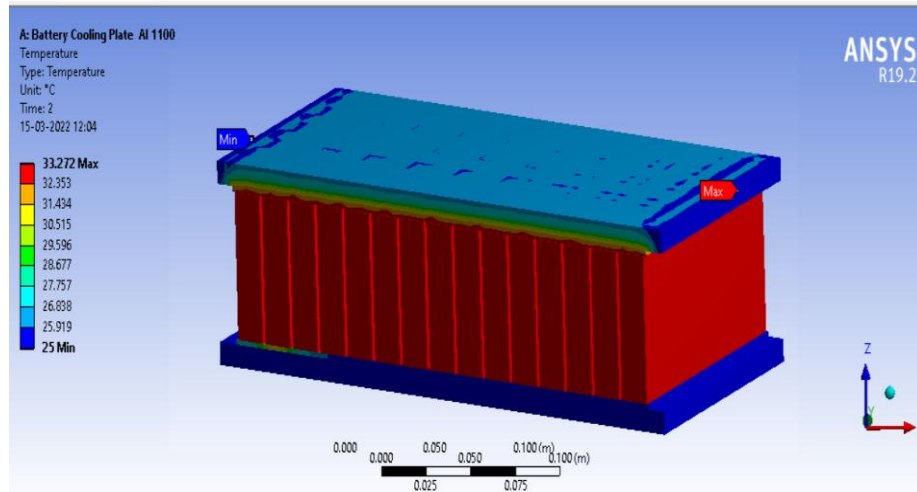


Fig.4.8 AL 1100 Alloy material cooling plate temperature results

### V. CONCLUSION

Here cooling plate four materials are taking like Al 1100 , AL oxide, Al 96 and Al 92 So

Here find out temperature results all four materials are Al 1100 , AL oxide, Al 96 and Al 92 ,33.27 °C, 33.09 °C,32.96 °C and 32.9 °C

Here find out heat flux results all four materials are Al 1100 , AL oxide, Al 96 and Al 92 , 1.52 e<sup>5</sup>, 1.71 e<sup>5</sup>, 1.52 e<sup>5</sup> and 1.43 e<sup>5</sup>

So here it is cleared that exiting material AL 1100 cooling plate has more temperature distribution and more heat flux released these all data find out with help of simulation software by ANSYS workbench 19.2 Thermal transient simulation platform So here find out less value of temperature and heat flux AL 92 Aluminum alloy..

### REFERENCES

- 1) Z. Shang, H. Qi, X. Liu, et al., Structural enhancement of lithium-particle battery for further developing warm execution in view of a fluid cooling framework, Int. J. Heat Mass Transf. 130 (2019) 33-41.
- 2) C. Qi, Y. Zhu, F. Gao, et al., Mathematical model for warm way of behaving of lithium particle battery pack under cheat, Int. J. Heat Mass Transf. 124 (2018) 552-563.
- 3) Z. Li, J. Huang, B.Y. Liaw, et al., On condition of-charge assurance for lithium-particle batteries, J. Power Sources 348 (2017) 281-301
- 4) Y. Zheng, M. Ouyang, L. Lu, et al. Understanding maturing systems in lithium-particle battery packs: from cell limit misfortune to pack limit advancement, J. Power Sources 278 (2015) 287-295.
- 5) X. Feng, L. Lu, M. Ouyang, et al., A 3D warm out of control proliferation model for a huge organization lithium particle battery module, Energy 115 (2016) 194-208
- 6) J. Zhang, J. Huang, Z. Li, et al., Comparison and approval of techniques for assessing heat age pace of huge organization lithium-particle batteries, J. Therm. Butt-centric. Calorimetry 117 (2014) 447-4617
- 7) A. Jarrett, I.Y. Kim, Influence of working circumstances on the ideal plan of electric vehicle battery cooling plates, J. Power Sources 245 (2014) 644-655.
- 8) Seungki Baek Sungjin Park\* "Warm Analysis of a Battery Cooling System with Aluminum Cooling Plates for Hybrid Electric Vehicles and Electric Vehicles" Hongik University, Seoul 121-791, Korea (Received 31 October 2013/Revised 27 January 2014/Accepted 3 February 2014)
- 9) Cao, J., Ling, Z., Fang, X., and Zhang, Z. (2020a). Deferred Liquid Cooling Strategy with Phase Change Material to Achieve High Temperature Uniformity of Li-Ion Battery under High-Rate Discharge. J. Power Sourc. 450, 227673. doi:10.1016/j.jpowsour.2019.227673
- 10) N. Wang, C. Li, W. Li, M. Huang, D. Qi Effect investigation on execution improvement of a clever air cooling battery warm administration framework with spoilers Appl. Therm. Eng., 192 (2021), Article 116932, 10.1016/j.applthermaleng.2021.116932