



## IJRTSM

### INTERNATIONAL JOURNAL OF RECENT TECHNOLOGY SCIENCE & MANAGEMENT

#### “THERMAL ANALYSIS OF 4 STROKE ENGINE CYLINDER WITH FINS”

Manoj Kumar Tiwari <sup>1</sup>, Dr P.K. Sharma <sup>2</sup>

<sup>1</sup> M.Tech Research Scholar, Mechanical Engineering Department, NIRT, College, Bhopal, MP

<sup>2</sup> Professor, Mechanical Engineering Department, NIRT, College, Bhopal, MP

#### ABSTRACT

*When fuel is burned in an engine, heat is produced. Additional heat is also generated by friction between the moving parts. Only approximately 30% of the energy released is converted into useful work while remaining 70% must be removed from the engine to prevent the parts from melting and A fin is a surface that extends from an object to increase the rate of heat transfer to or from the environment by increasing convection. The amount of conduction, convection, radiation of an object determines the amount of heat it transfers and here used one material aluminum 6061 exiting with four different likes geometry rectangular, circular, angular fins, curved fins and curved geometry. Aluminum 6061 then all geometry like rectangular, circular, and curved fins geometry get temperature results respectively 285<sup>0</sup>C, 285<sup>0</sup>C, and 285<sup>0</sup>C. Here take aluminum 6061 then all three geometry like rectangular, circular, and curved geometry get heat flux results respectively. 4 w/mm<sup>2</sup>, 0.55w/mm<sup>2</sup> and 6.9 w/mm<sup>2</sup>. So here suggested curved fins geometry is better compared to all geometry.*

**Keyword:** Aluminum 6061, temperature, heat flux, cooling, fins. Geometry.

#### I. INTRODUCTION

Generally or practically all ignition motors Engines are liquid cooled utilizing either air (an perform liquid) or a fluid specialist like water running ceaselessly utilizing mechanical siphon through a gadget (radiator) cooled via air. In air cooling framework, heat is dispensed or driven away by the air streaming over and around the chamber. Here blades are sew the plate and chamber barrel which give further warmth conductive and heat emanating surface. In water cooling arrangement of cooling motors, the chamber dividers and heads are given or outfitted with coat Cooling blades encourage keep Chevrolet potential unit battery at perfect temperature we as a whole handle that essentially just if there should arise an occurrence of ignition (IC) motors, burning of air and fuel happens inside the motor

chamber and hot gases are produced. The temperature of gases is around 2300-2500°C. this might be a horrendously high temperature and will result into consuming of oil film between the moving parts and will result into seizing or attaching of indistinguishable. Thus, this temperature should be diminished to with respect to 150-200°C at that the motor will work most quickly. an over the top amount of cooling is to boot not captivating since it lessens the warm intensity or proficiency. Thus, the objective or reason for this cooling framework is to remain the motor running at its most operational temperature while not warm gathering inside the motor. it's to be noticed that the motor is style of wasteful once it's cold and in this manner the cooling framework is assumed in such the way that it forestalls cooling once the motor is warming or warming up and till it accomplishes generally affordable or specialist resistible by motor working temperature, at that point it begins cooling.

**Cooling System:****Types of Cooling System**

There are essentially two sorts of cooling fins:

1. Air cooled fins, and
2. Water cooled fins.

**Air Cooled System**

Air cooled fins is commonly utilized in low capacity engines state up to 15-20 kW or force unit and in aero plane engines. all through this system balances or broadened surfaces (as we as a whole realize heat move might be upgraded by expanding the surface region) are given on the chamber dividers, plate, and so forth the quantity of warmth disseminated to air relies.

- Amount of air or mass pace of stream of air moving through the fins.
- Fin cross-sectional space.
- Thermal conduction (K) of metal utilized for balances.

**Water cooled fins**

The fins are designed to boom the surface vicinity with every other liquid (air for example). Right here the heat is transferred using convection, cooling the fins and warming the liquid. Thanks! Cooling fins speed up the warmth switch as they invent a miles large surface place with the liquid than could in any other case be to be had

**Advantages of Air Cooled System:**

Following are the benefits of air cooled fins:

- Radiator and siphon (used to unendingly give water round the chamber) is missing so the fins is light-weight.
- Just in the event of water cooling fins there are spillages associated disadvantage, however throughout the instance of air cooling case there aren't any overflowing associated drawback.
- Coolant and fluid arrangements don't have all the earmarks of being required..
- This fins are typically utilized in cool atmospheres, where if water is utilized it should freeze

**Disadvantages of Air Cooled System:**

- Comparatively it's less practical.
- It is utilized in aero planes and cruiser engines where the engines are presented to air directly.

**Fins**

A fin is a surface area that extends from an object to augment the rate of heat removal or from object to the environment by rising convection. Rising the temperature difference between the heated surface and the environment, increasing the convection heat transfer coefficient, or increasing the surface area of the object increases the heat transfer coefficient. Occasionally it is not cheap or it is cylinder, however, increases the surface area and can at times be a cheap solution to heat transfer problems. are usually extended surfaces or projections of materials on the system. Generally sma and compressor and electric engine are using fins for cooling purpose. Fins are also used in many refrigerators (evaporators and condensers) for increasing the heat removal rates. In the present research, the fins that are of cross sections and of same material (aluminum are essential for appropriate design of fins. The main intention of present research is to conclude the most effectual cross section amongst the different cross sections available. The efficiency and effectiveness of various cross sections are determined experimentally by cross sectional area and volume as constant for each cross section.

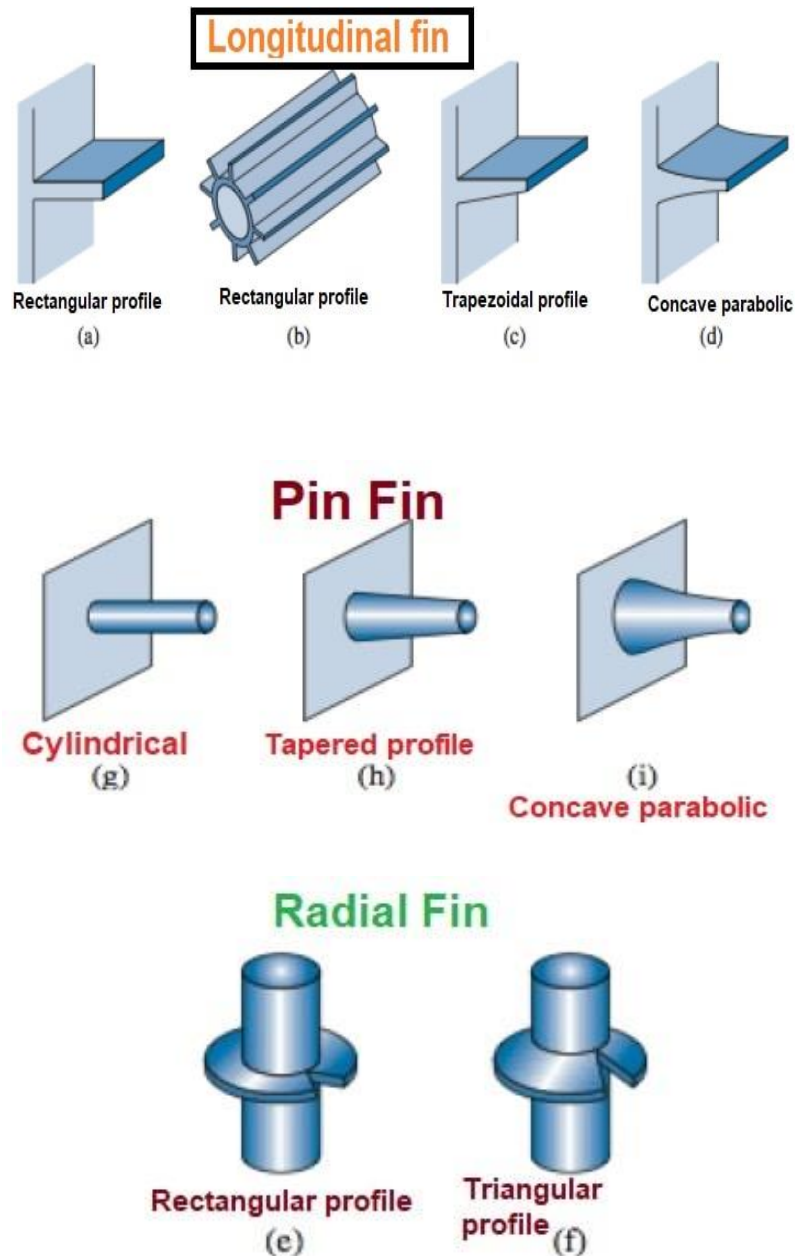


Fig.1 Types of Fns

## II. MATERIAL PROPERTIES

### Aluminum Alloy 6061

Thermal conductivity  $K = 180 \text{ W/m-K} = 0.2 \text{ W/mm-K}$  Specific heat  $C_p =$

$0.896 \text{ J/g}^\circ\text{C} = 896 \text{ J/Kg-K}$

Density =  $2700 \text{ kg/m}^3$

Boundary Condition:

Melting temperature =  $586^\circ\text{C}$  Ambient

Temperature:  $40^\circ\text{C}$  Cylinder Internal

Temp. =  $284^\circ\text{C}$  Heat Flow =  $632.14 \text{ Watt}$

Film coefficient value =  $5 \times 10^{-006} \text{ w/mm}^2 \text{ }^\circ\text{C}$

Aluminum alloy 6061 is precipitation-hardened and primarily consists of magnesium and silicon as alloying elements. It was developed in 1935 and was originally known as "Alloy 61S." [2] It has excellent mechanical properties, is easy to weld, and is one of the most widely extruded aluminum alloys—second only to 6063 in popularity. [3]

Pre-tempered grades like 6061-O (annealed), tempered grades like 6061-T6 (solutionized and artificially aged), and tempered grades like 6061-T651 (solutionized, stress-relieved stretched, and artificially aged) are typically available.

T6 temper 6061 has been treated to give an aluminum alloy made of 6061 the highest precipitation hardening and, as a result, the highest yield strength. It has a minimum yield strength of 240 MPa (35 ksi) and an ultimate tensile strength of at least 290 MPa (42 ksi). It has elongation of 8% or more in thicknesses of 6.35 mm (0.250 in) or less, and its more typical values are 310 MPa (45 ksi) and 270 MPa (39 ksi), respectively. [10] It has 10% elongation in thicker sections. The mechanical properties of T651 temper are comparable. A material data sheet [11] states that the fatigue limit under cyclic load is 97 MPa (14 ksi) for 500,000,000 completely reversed cycles using a standard RR Moore test machine and specimen. The typical value for 6061-T6's thermal conductivity at 25 °C (77 °F) is around 152 W/m K. Because aluminum's S-n graph lacks a clearly defined "knee," there is some debate regarding how many cycles constitute "infinite life." Additionally, keep in mind that the standard de-rating factors of loading, gradient, and surface finish can have a significant impact on the actual value of the fatigue limit for an application.

### III. ANALYSIS

#### Finite part Analysis:

It's a methods for assessing yet an item responds in globe all through powers, heat and liquid stream, vibration and distinctive physical impacts. It to boot assists with validating whether or not an item will fall flat or work the manner in which it had been structured. inside the blessing work Transient warm examination is performed for single chamber four stroke sparkle start motor of Hero Honda 100 cc Bike with the assistance of seat of ANSYS R 19.2.

#### Transient Thermal Analysis for Actual style of Engine:

Warm investigation may be a strategy inside that a property of the work is observed against the time and in a passing positive district conditions. The warm investigation licenses discovering that however concoction forms that unit related with warming or cooling. Transient warm examination is utilized to make sense of temperature appropriation and diverse warm parameters which can differ over the time. The system of transient warm investigation is exceptionally a lot of equivalent as consistent state warm examination. the preeminent qualification is that for the first [\*fr1] applied loads of for the transient warm investigation are a work of it moderate.

#### CAD Geometry:

In the blessing work The CAD geometry of motor is made with the assistance of car CAD pioneer programming framework bundle with real measurement, at that point outside in ANSYS seat for any Transient warm investigation. Computer aided design geometry in three dimensional sweep of motor chamber.

### IV. BOUNDARY CONDITION

Encompassing Temperature: 284<sup>0</sup>C

Chamber Internal temp. = 284<sup>0</sup>C

Warmth Flow = 632.14 W

Film steady worth = 5x10-006 w/mm2 <sup>0</sup>C

V. SIMULATION

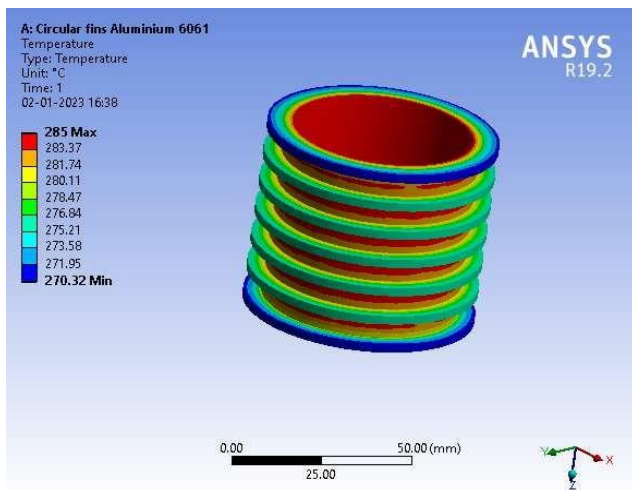


Fig.2 Circular fins Al 6061 materials temperature results

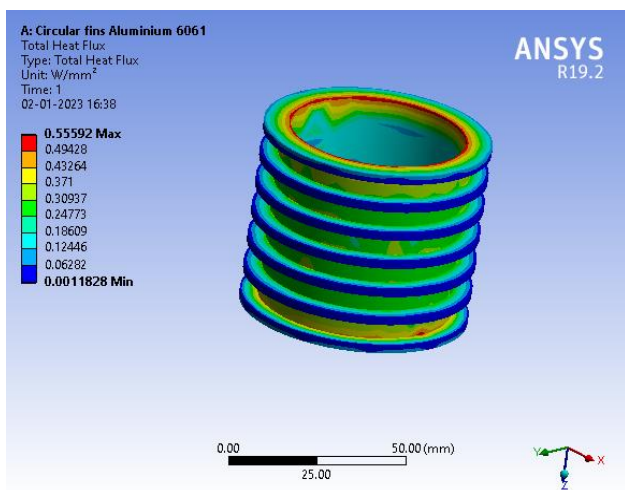


Fig.3 Circular fins Al 6061 materials heat flux results

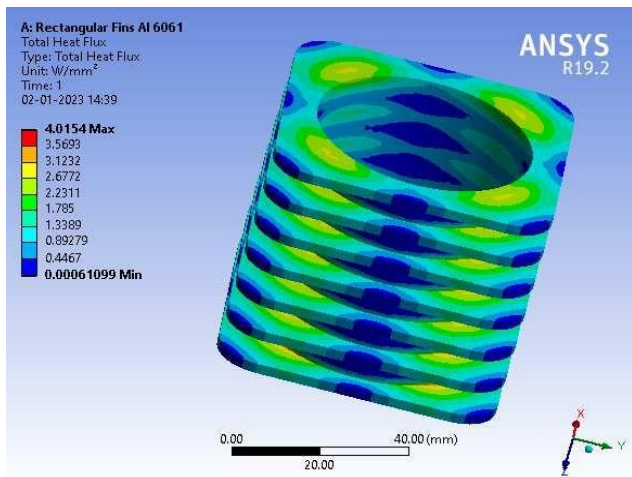


Fig.4 Rectangular fins Aluminum 6061 temperature result

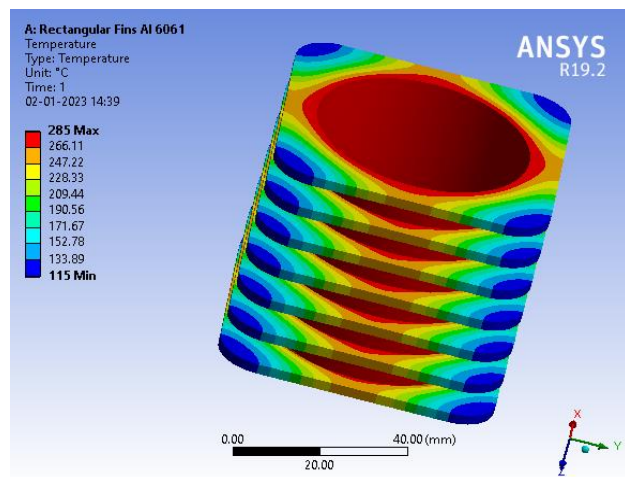


Fig. 5 Rectangular fins Aluminum 6061 temperature result

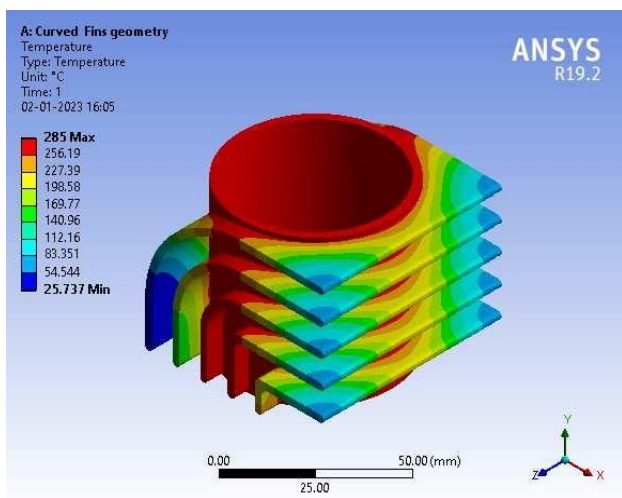


Fig.6 Curved fins Al 6061 temperature results

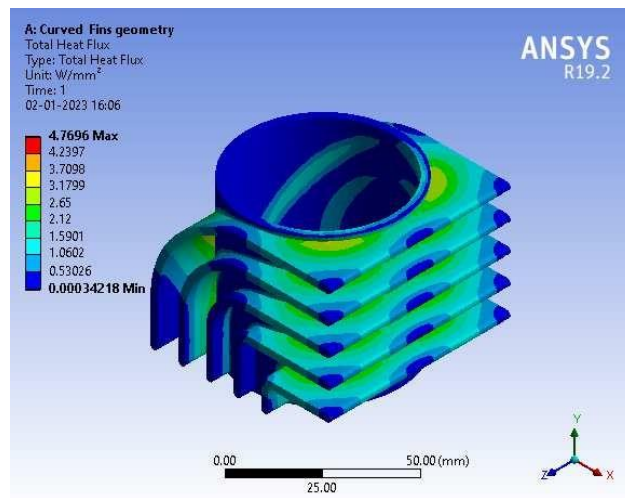


Fig.7 Curved fins Al 6061 heat flux results

Table 5.1 overall results summary

Materials	Temperature/Heat Flux	Circular Geometry	(Exiting ) Rectangular Geometry	Curved Geometry
(Materials )AL 6061	Temperature ( °C)	285	285	285
	Heat Flux(w/mm <sup>2</sup> )	0.5	4	6.9

## VI. RESULT & DISCUSSION

Efficient cooling system can extend engine life and improve performance. Most of the time, the cylinder head and block's fin designs determine how the air-cooled engine cools itself. High thermal stresses and decreased engine performance are the results of insufficient heat removal from the engine. The heat from the engine may be removed by the air transport to the cooling fins. The main issue with this type of cooling is the slow rate of heat transfer through cooling fins. Here, the entire geometry of the engine head fins was created using a model of the engine bike head fins and the 3D showing application SOLIDWORK 2021. One material, Aluminum 6061, was utilized to create four distinct geometries: rectangular, circular, angular fins, curved fins, and curved geometry. Here all geometry of engine head fins utilized a bike engine head fins model and 3D displaying programming SOLIDWORK 2021 . We have a used one material Aluminum 6061 exiting with three different likes geometry rectangular, circular, curved fins and curved geometry. Aluminum 6061 then all geometry like rectangular, circular, angular fins and rectangular fins geometry and curved fins geometry get temperature results respectively 285<sup>0</sup>C, 285<sup>0</sup>C, . and 285<sup>0</sup>C. Here take aluminum 6061 then all four geometry like rectangular, circular, and curved geometry get heat flux results respectively. 4 w/mm<sup>2</sup> , 0.55w/mm<sup>2</sup>, and 6.9 w/mm<sup>2</sup>. So here suggested curved fins geometry is better compared to all geometry.

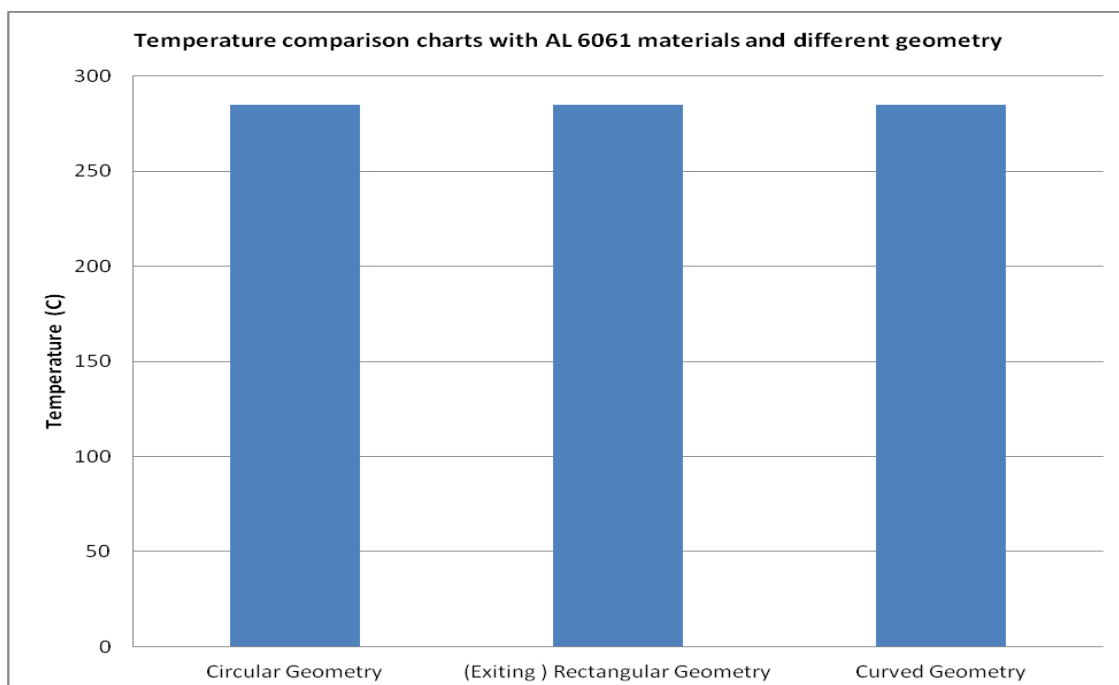


Fig. 11 Temperature comparison charts with AL 6061 materials and different geometry

## VII. CONCLUSION

During this paper we have structured a chamber geometry collection of engine head and utilized a engine bike engine head fins model and 3D displaying programming fins bundle SOLIDWORK 2021 and utilized material for balance body is component amalgam balances and inner center with dark cast iron. We have a used one materials Aluminum 6061 exiting with four different likes geometry rectangular, circular, curved fins and Curved Geometry. Exiting rectangular geometry is using but it has low heat flux value. We can suggested new curved shape geometry aluminum 6061 for better engine performance it has more heat flux value compare to exiting geometry.

### .REFERENCES

- [1] M M Abbood, H N Azziz "Investigating the consequences of fin geometry on bike cylinder cooling IOP conference collection: " 1067 012102, substances science and Engineering, 2021
- [2] Abhishek Dasore a, Upendra Rajak a, Ramakrishna Konijeti b, Ramakrishna Balijepalli a, okay. Prahlada Rao c, Charan Kumar Ganteda b, Tikendra Nath Verma, Comparative numerical research of square and elliptical fins for air cooled IC engines, 2021
- [3] S.Okay. Mohammad Shareef a, M Sai Vikas a, A.L.N Arun Kumar a, Abhishek Dasore c, Sanjay Chhalotre b, Upendra Rajak c, Trikendra Nath Verma d, layout and thermal evaluation of engine cylinder fin body using diverse fin Profiles,2021, <https://doi.org/10.1016/j.matpr.2021.04.116>,2214-7853/ 2021 Elsevier Ltd. All rights reserved.
- [4] J. Laxmi Prasad, NEC Prasad, and Bugudala Srinivas, warmness switch evaluation for two-wheeler engine cooling fins by using the usage of CFD, third international conference on "advancements in Aeromechanical substances for manufacturing", <https://doi.org/10.1063/5.0036340>, 05 February 2021
- [5] B.J. Patil and V. Shetty, Thermal analysis of wheeler engine fins, materials today: complaints, <https://doi.org/10.1016/j.matpr.2021.04.116>, 2214-7853/ 2021 Elsevier Ltd. All rights reserved
- [6] I. El Ghandouri, A. El Maakoul, S. Saadeddine, M. Meziane, design and Numerical Investigations of herbal Convection warmth switch of a new Rippling Fin form, carried out Thermal Engineering (2020), doi: <https://doi.org/10.1016/j.applthermaleng.2020.115670>
- [7] P. Senthilkumar, S. Rajesh Babu, B. Koodalingam et al., design and thermal evaluation on round fin, materials these days: proceedings, <https://doi.org/10.1016/j.matpr.2020.02.784> , 2020, 2214-7853/ 2020 Elsevier Ltd. All rights reserved.
- [8] C. Thiagarajan, M. Prabhakar, S. Prakash et al., warmness transfer evaluation and optimization of engine cylinder liner the usage of one-of-a-kind substances, substances nowadays: court cases, <https://doi.org/10.1016/j.matpr.2020.06.173> , 2214-7853/ 2020 Elsevier Ltd. All rights reserved.
- [9] S. Padmanabhan, S. Thiagarajan, A. Deepan Raj Kumar et al., investigation of temperature distribution of fin profiles the usage of analytical and CFD evaluation, substances these days: complaints, <https://doi.org/10.1016/j.matpr.2020.09.404>, 2214-7853/ 2020 Elsevier Ltd. All rights reserved
- [10] Nitesh Kumar Yadav, Suman Bikram Bam, and Sujana Shrestha\* examining warmth transfer thru IC Engine Fins," researchgate.Book, August 2019,
- [11] Vishal Gupta, Pradeep Kr., Naman Sahu\*, Kurmi" Thermal evaluation using FEM on Engine Fins: A assessment," IJTIMES (worldwide journal of Technical Innovation in modern-day Engineering and technological know-how), volume 4, number eight, August 2018
- [12] Charan, Srivastav, and Bharadwaj, "warm analysis On square Plate Fin with Perforations the use of Ansys," global magazine of creative studies mind, 2018.
- [13] Yakkala, k. Rama Chandra Manohar Somanath, M.Okay. Raghunadh. IOP Conf., "Optimization of Engine Fins of varying warmness transfer and Thermal Conductivity," by way of B. Santosh and B. Koteswararao. Arrangement: Engineering and substances science (2018)
- [14] Kiran Beldar and Avinash Patil posted "design and analysis of Chamber having Longitudinal Balances with rectangular Indents" inside the 2017 trouble of the international journal of scientific development and research (IJS DR).